


## Chemiflex® Composite Hose Type 424

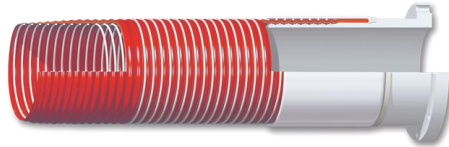

### Applications

This type is recommended for use as a tank truck, railcar and in-plant multi chemical transfer applications where the economy and maximum chemical resistance of a polypropylene coated inner wire is required. A stainless steel outer wire is available for applications which include a corrosive environment.

### Technical description

Lining:	PFTE
Inner wire:	Stainless Steel 316
Outer wire:	SGF424 Galvanized Steel SSF424 Stainless Steel 304 or 316
Cover:	PVC coated Nylon, abrasion, UV and ozone resistant, red temperature
Range:	-30°C to + 100°C (-22°F to + 212°F)
Electrical properties:	Electrically Conductive Standard: EN13765:2010, Type 2
Complies with:	IMO IBC code
Approval:	ClassNK Certificate NO. TA11773E(AL)

### Physical properties

Maximum elongation	: 10% on test
pressure Vacuum range	: 0,9 bar

### End fittings

Specially designed end fittings have been developed for use with Amnitec composite hoses, including threaded ends, flanged ends and other connections. By means of a hydraulic operated press, a ferrule is externally swaged onto the hose to secure the hose shank and guarantee a leak proof connection between hose and fitting. All ferrules are welded to the end fitting before swaging for even safer operating conditions.

TECHNICAL DATA: TYPE SGF424, SSF424									
Inside Diameter		Working Pressure		Min. Bend Radius		Approx Weight		Maximum Length	
Inches	mm	PSI	Bar	Inches	mm	lb/ft	kg/m	Feet	Meters
1	25	150	10	4	100	0.65	1.00	65	20
1½	40	150	10	5¼	130	0.85	1.25	65	20
2	50	150	10	6½	165	1.20	1.80	65	20
2½	65	150	10	7½	185	1.70	2.50	65	20
3	80	150	10	9½	240	2.00	3.00	65	20
4	100	150	10	14½	360	3.00	4.50	65	20

Pressure based on safety factor 5:1

All information in this document is without any obligation, dimensions and weight are approximate only and the specifications are subject to change without any notice.