
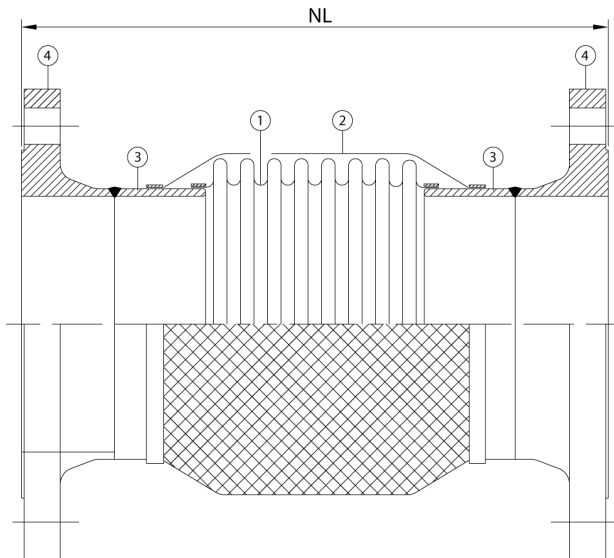


Stainless steel braided connector, type RFB

Applications

A flexible connector for higher pressure applications in combination with lateral movements and vibration, for the use in thermal oil pipe systems. This type of connector is basically meant to accommodate universal lateral movements (vibration) only. Type RFB provided with flanges.



Technical description

Bellow (1)	: AISI 316
Braiding (2)	: AISI 304
Welding ends (3)	: Carbon Steel
Flanges (4)	: Carbon Steel, PN 16

Values given in column vibration are only applicable at a max pressure of 10 bars

Diameter	NL	Lateral		Max.
DN	neutral length	deflection	vibration	pressure
mm (in)	mm	mm	mm	@250°C/bar
40(1½")	366	5	2	16
50(2")	354	5	2	16
65(2½")	347	4	1.2	16
80(3")	366	4	1.2	16
100(4")	364	3	0,7	16
125(5")	372	3	0,7	16
150(6")	366	2	0,7	16
200(8")	419	2	0,7	16
250(10")	580	2	0,7	10

For combined movements, consult Amnitec BV.

All information in this document is without any obligation, specifications subject to change without any notice.